
MACHINERY EUROPE s.r.o., Hněvkovská 42, 148 00 Prague 4, Czech Republic
tel./fax: +420 272 935 288, **e-mail:** sales@machineryeurope.com

Curriculum Vitae of the machine Reference number: 26543

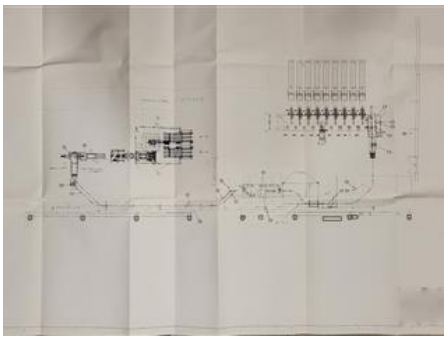

FERAG 41.85.16
Collating and Stitching Line

SPECIAL OFFER

Manufacturer:	Ferag AG, Zürich, Switzerland
Production Year:	2007
Availability:	immediately
Condition of the Machine:	functional, condition and wear and tear according to its age, well maintained not in production but still plugged in
Disclaimer:	The Condition of the Machine assessment presented in this CV was either obtained from the last machine operator or is based on an inspection performed by our employee, just to provide you with as much information as possible. For more certainty we recommend your own check or an assessment of an independent mechanic. We cannot provide you with any machine guarantee.

More Details:
Gross format (W × H): min. 152 × 217 mm, max. 315 × 340 mm
Final format (W × H): min. 148 × 210 mm, max. 300 × 332 mm
Saddle feeder: 110 × 95 to 315 × 340 mm
Gluing of single sheets only – no blocks:
55 × 85 to 280 × 200 mm and 85 × 55 mm
A credit-card-sized card can be glued either lengthwise or crosswise
Number of gatherer stations: 8
Number of glued-sheet feeders: 1
Maximum book thickness: 5 mm
Signature lap: 8–12 mm – rear lap only
Signatures without a lap are possible, but not across the full format range
In-line trimming is not possible
Head and foot trim: 3.5–50 mm
Side trim: 3.5–50 mm
Landscape products cannot be trimmed on the three-knife trimmer
Stitches:
2 or 3 wire stitches
Stitch size: 15 mm
Maximum distance between outer stitches: 160 mm
Distance from outer stitch to center stitch: 80 mm
The stitch heads are fixed. Individual stitch heads can be disabled, while the product position can be adjusted relative to the stitches
With two stitches:
A4: upper and lower stitches are used, center stitch disabled
A5: upper and center stitches are used, lower stitch disabled
Hanger loops: not available
Cover:
The cover must be folded before feeding
It is fed from the signature feeder (or by using Unicover)
Paper weight (A4)
80–300 g/m² for uncoated papers and coated boards,
max. 255 g/m² for folding boxboard
Minimum cover weight: 10 g
Covers with the flap facing outward cannot be processed. They can only be processed with the flap inward and then manually turned over
Half cover
Fed from the signature feeder and must be pre-folded
Paper weight: 130–200 g/m²
Minimum width for A4: 110 mm
Signatures
Signature weight: 10 g
RIMA system:
RIMA machine for transporting of stacks of booklets into stackers